


SIGMA HLR



PRESSURE SENSORS HLR 7970 SERIES

- Fully adjustable 10 to 10,000 PSI
- One Spring
- Four Piston Arrangements included with each and every sensor
- The most versatile stick pilot on the market

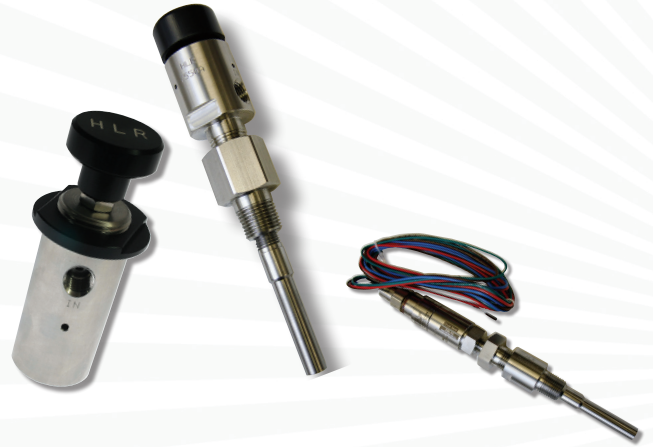


SAND PROBES QUICK EXHAUST

- Pneumatic or Electric
- For 2", 3", 4" and 6" Pipe
- 1/2" NPT Connection up to 10,000 PSI Working Pressure
- 1" MP Autoclave Connection up to 15,000 PSI Working Pressure



HI-LO CONTROLLER UNITS (PSHL)

- Adjustment Ranges
- 10-10,000 PSI (NPT)
- 2,000 to 20,000 PSI (Autoclave style)

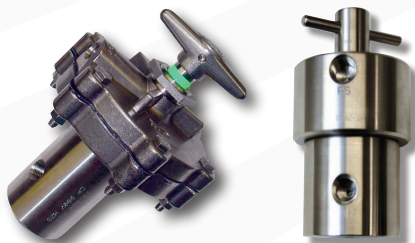

HYDRAULIC INTERFACE VALVES

- Pilot Operated - Pneumatic and Hydraulic
- 2-way and 3-way
- Normally Opened or Normally Closed
- Pressures to 15,000 psi
- Sizes from 1/4" to 3/8" High Flow



HYDRAULIC REGULATOR

- Adjustable
- Inlet Pressures to 10,000 psi
- Normally Opened or Normally Closed
- Pressures to 15,000 psi
- Sizes from 1/4" to 3/8" High Flow

SIGMA HLR

FUSIBLE DEVICES

- Temperature Safety Equipment- Valves and Plugs
- 2-way and 3-way valves
- Valve Sizes from 1/4" to 1/2" NPT
- Plug Sizes from 1/4" to 2"
- Temperatures: 158°, 203°, 255°, 281° F



MANUAL RELAYS

- Pull and Pin - with and without Air Latch
- Standard Pattern - Miniature Right Angle
- Sizes from 1/8" to 1/2" NPT

QUICK EXHAUST VALVES

- Pneumatic and Hydraulic
- Pressures to 10,000 psi
- Sizes from 1/4" to 1" NPT



RELIEF VALVES

- Pneumatic and Hydraulic
- Standard Pattern - Miniature Right Angle
- Sizes from 1/8" to 1/2" NPT

CONTROL SYSTEM ACCESSORIES

- Reservoir Vent Caps
- Restriction Orifices
- Check Valves
- Pressure Indicators



EMERGENCY SHUTDOWN DEVICES (ESD/FSD)

- Valves and Stations
- 2-way and 3-way Manual Valves (Push-Pull)
- ESD/FSD Signs
- Mounting Systems

